

# Honda CRF250 Rally

## Installation Guide

A qualified, experienced motorcycle technician should install Rockfox products. If you are unsure of your ability to properly install a product, please have the product installed by your local motorcycle dealer. Rockfox takes no responsibility for damages caused by improper installation. All screws, bolts and nuts, including all replacement hardware provided by Rockfox, should be tightened to the torque specified in the OEM maintenance manual for your motorcycle. If no torque specifications are provided in the OEM maintenance manual, the following torques may be used: M6 – 9,6Nm; M8 – 23Nm; M10 – 46Nm. All screws, bolts and nuts should be checked after driving the first 50 km to ensure that all are tightened to the proper torque. Medium strength liquid thread-locker (i.e., "Loctite") should be used to secure all screws bolts and nuts.

Tools required: M8 Allen key  
M6 Allen key  
10 Spanner

Contents: 1 x Left Side Crashbar  
1 x Right Side Crashbar  
1 x Centre Piece  
2 x Steel Slide Nuts  
2 x M6 U-Bolts  
2 x M6 Grubscrews

### Right Side

#### Step 1



Fit the slide nuts to the rear of the crashbar, using the bolts provided.

Do not tighten fully.

#### Step 2



Remove the front panel of the motorcycle.


### Step 3



Insert the slide nut into the space below the footpeg.

Tighten the bolt just enough so that the bar can still be moved around.

### Step 4

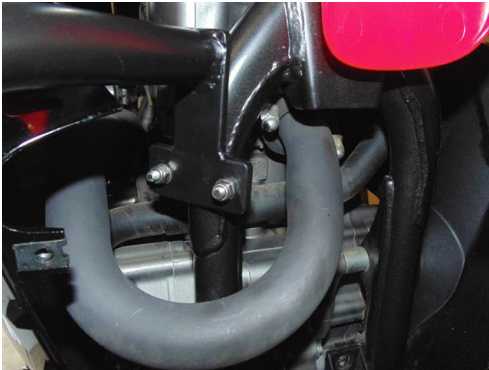

Fit the front of the crashbar around the frame of the motorcycle using the U-bolts. The U-bolt might need to be pulled open ever so slightly to make an easier fit. Attach the nuts just until they reach the nylon section.

**Repeat Step 1, 2, 3 and 4 for the left hand side.**

### Step 5



Refit the centre plastic of the bike and insert the crossbar between the two crashbars.

## Step 6



insert the two grub screws into the crossbar and tighten the crashbars fully. Start with the slide nuts at the back then the U-bolts and finally the grub screws.

As a precaution go through all bolts and nuts and tighten as needed.

## Final product



Please contact us if any problems occur or if bars are difficult to fit.

Regards  
The Rockfox Team